



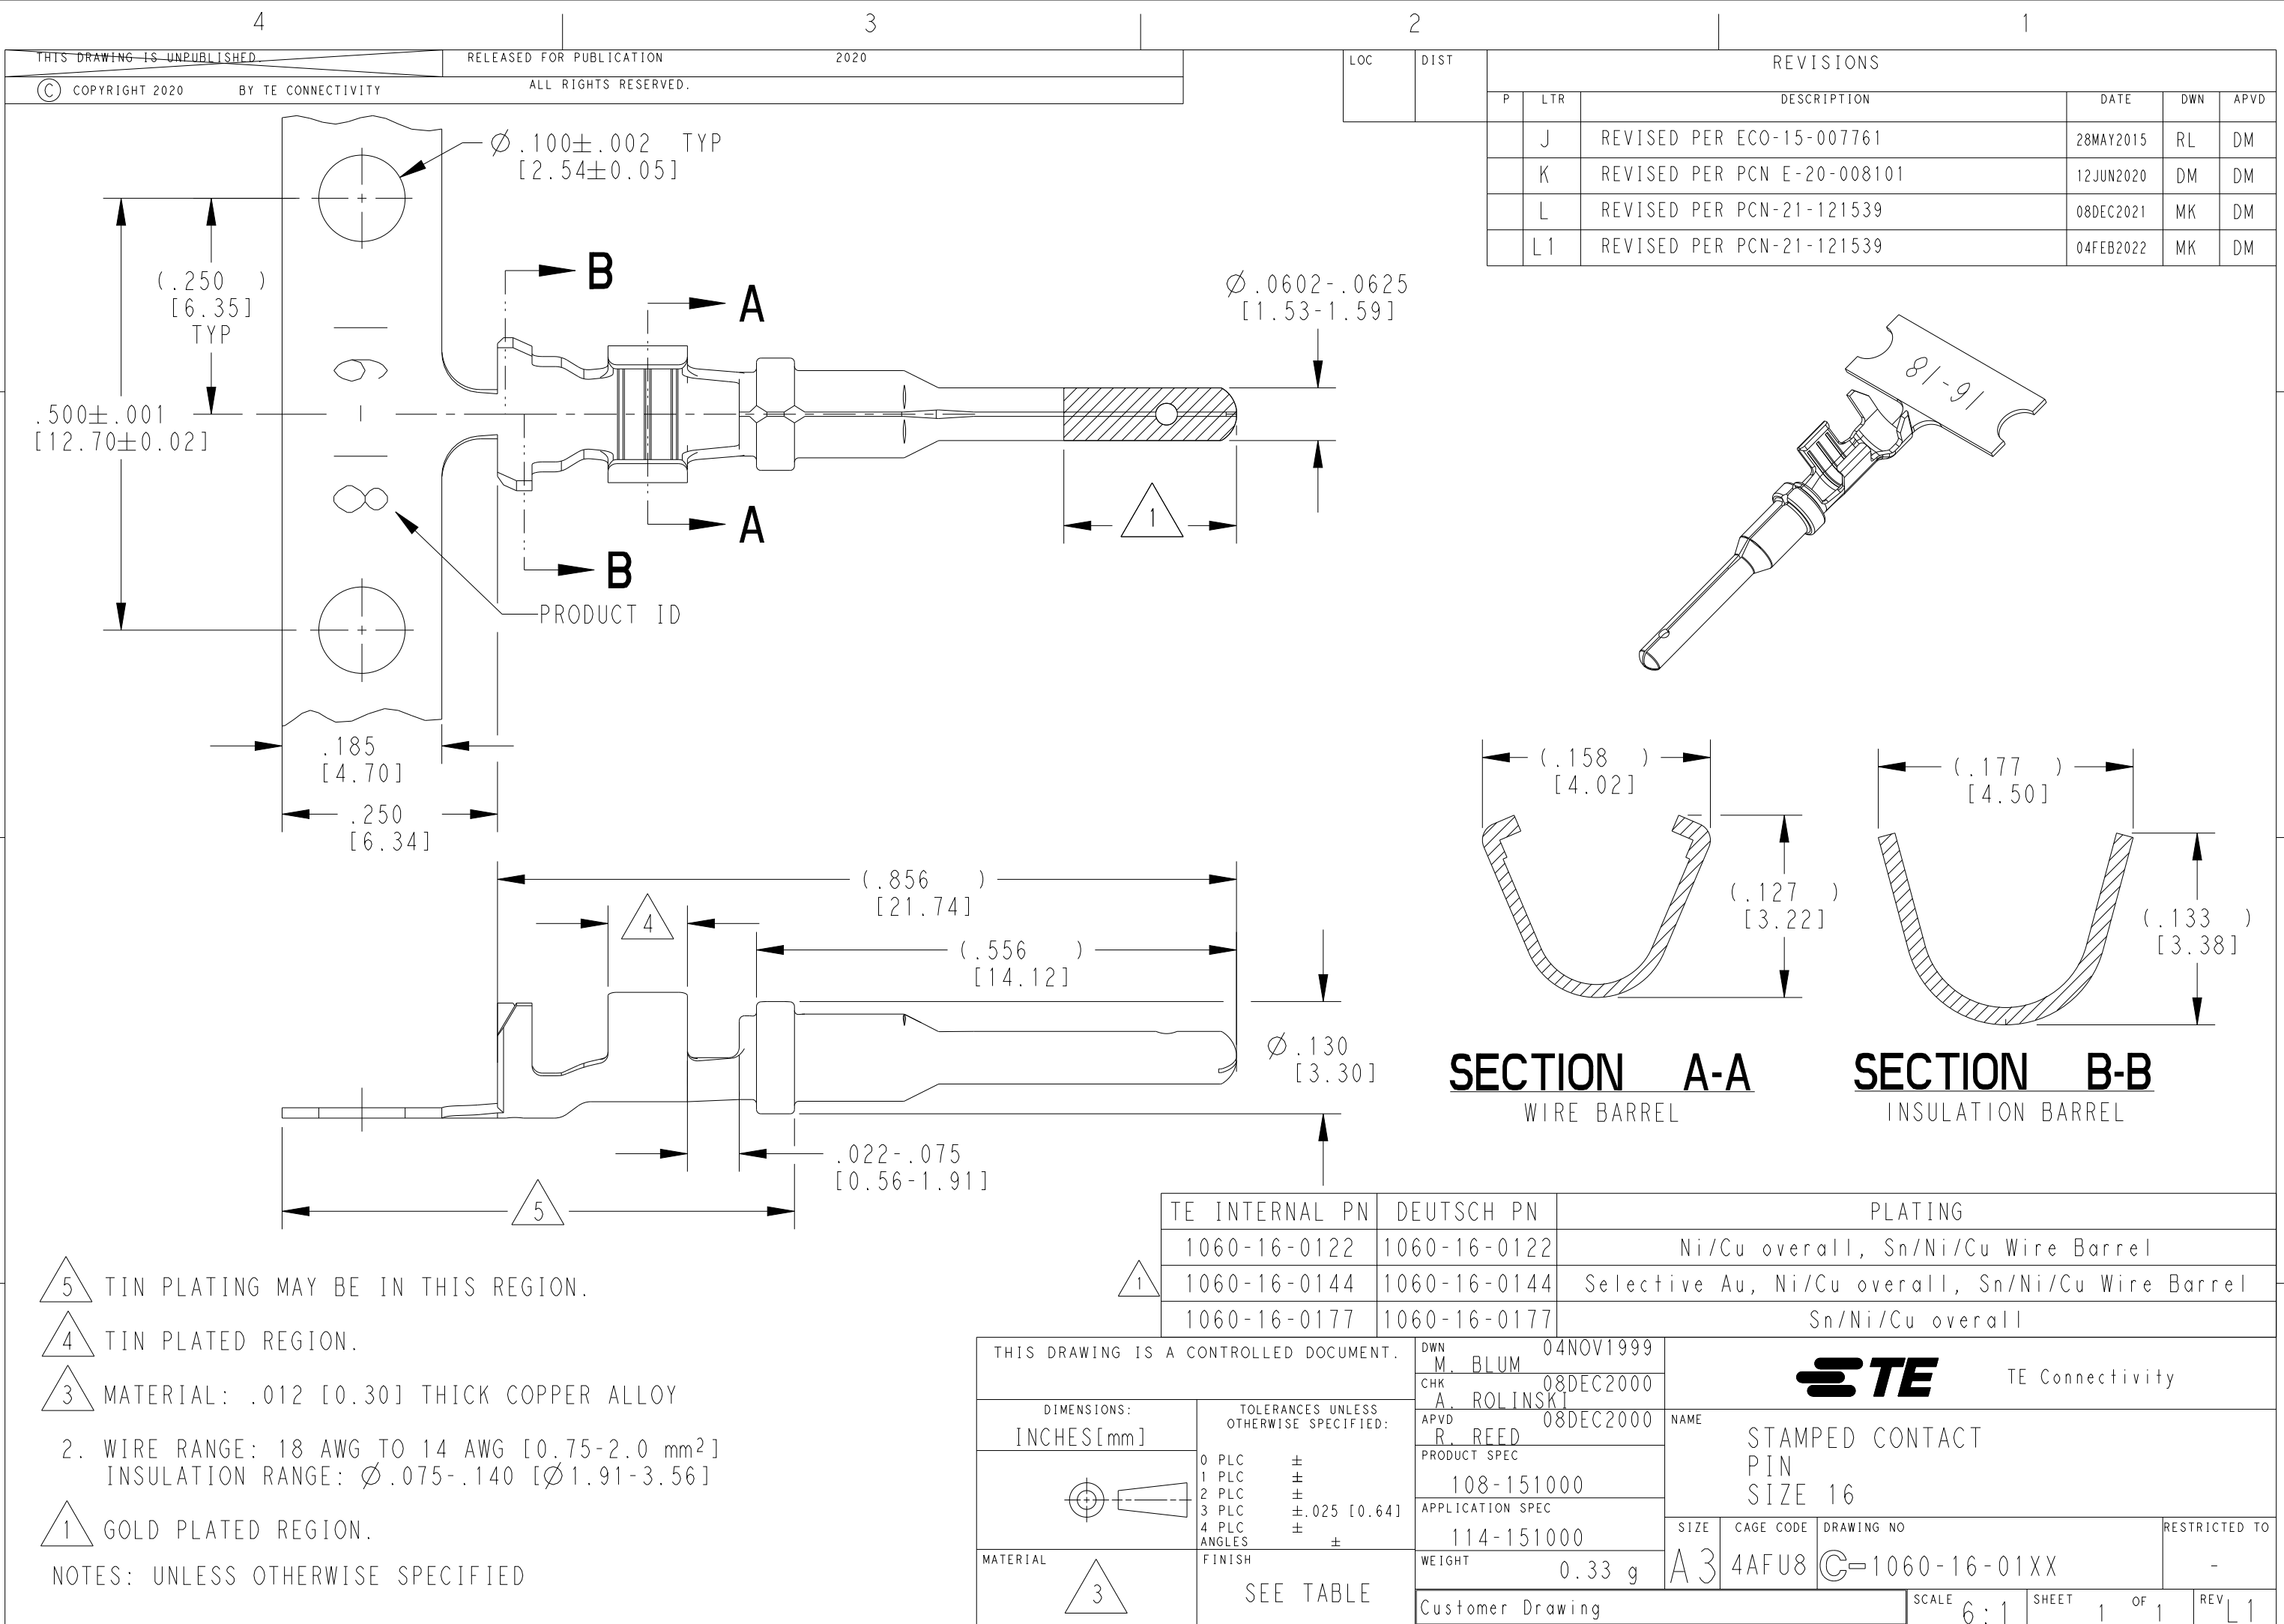

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	APVD
			J	REVISED PER ECO-15-007761	28MAY2015	RL
			K	REVISED PER PCN E-20-008101	12JUN2020	DM
			L	REVISED PER PCN-21-121539	08DEC2021	DM
			L1	REVISED PER PCN-21-121539	04FEB2022	DM

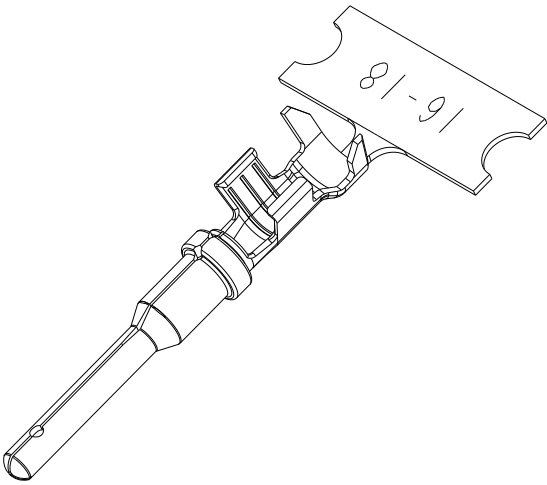

SECTION A-A
WIRE BARREL

SECTION B-B
INSULATION BARREL

TE INTERNAL PN	DEUTSCH PN	PLATING
1060-16-0122	1060-16-0122	Ni/Cu overall, Sn/Ni/Cu Wire Barrel
1060-16-0144	1060-16-0144	Selective Au, Ni/Cu overall, Sn/Ni/Cu Wire Barrel
1060-16-0177	1060-16-0177	Sn/Ni/Cu overall

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. BLUM	04NOV1999	TE Connectivity		
		CHK A. ROLINSKI	08DEC2000			
DIMENSIONS: INCHES[mm]		APVD R. REED	08DEC2000	NAME STAMPED CONTACT PIN SIZE 16		
		PRODUCT SPEC	108-151000			
		APPLICATION SPEC	114-151000	SIZE A3		
MATERIAL 3		WEIGHT	0.33 g			
		FINISH SEE TABLE		CAGE CODE 4AFU8		
				DRAWING NO C-1060-16-01XX		
				RESTRICTED TO -		
				SCALE 6:1		
				SHEET 1 OF 1		
				REV L1		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1060-16-0122](#)