




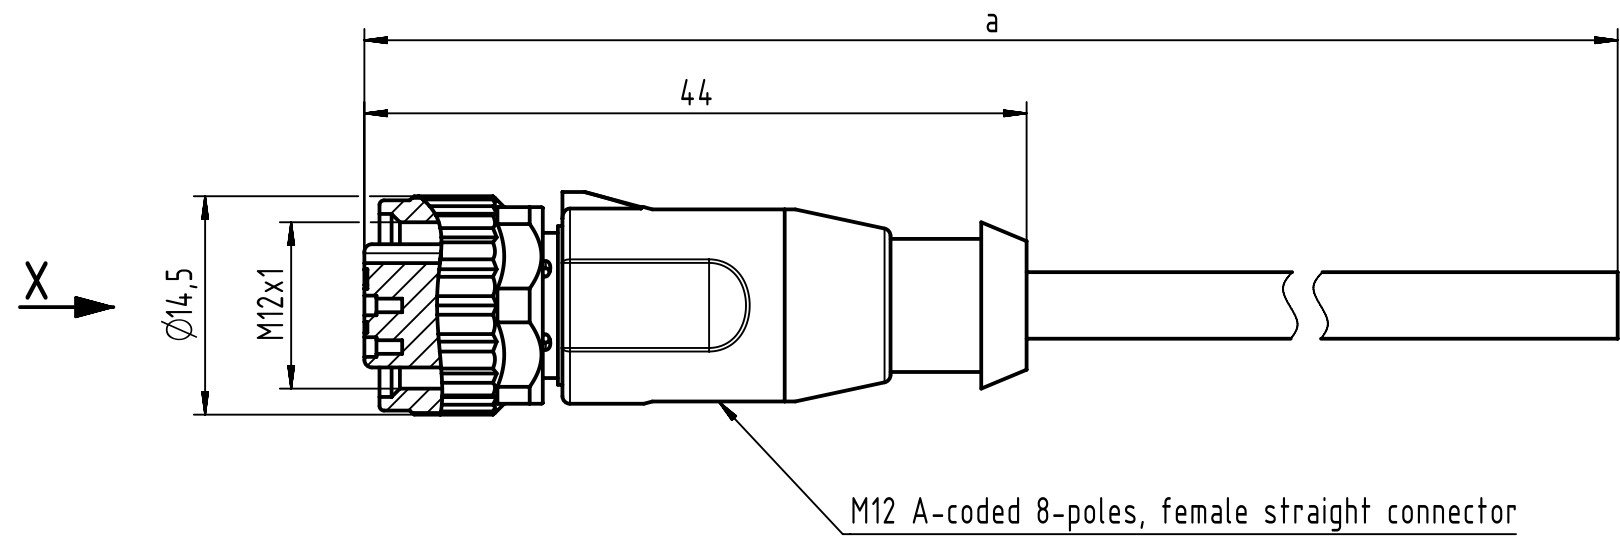

Loading-Plan:

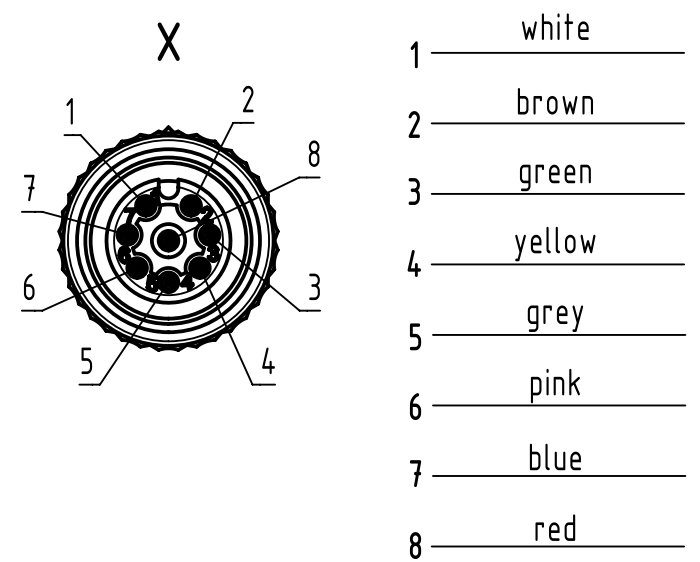

- Protection level: IP67  
- Temperature range: -25°C ... +80°C

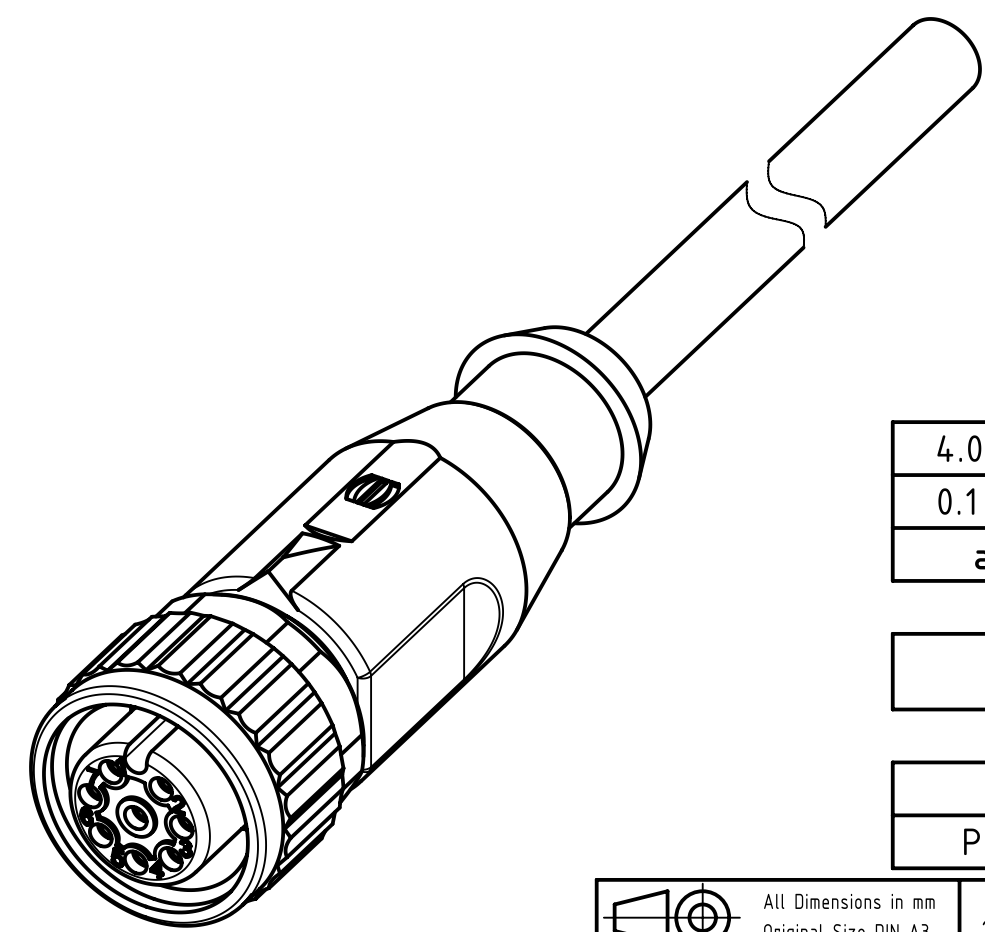

|                                |       |         |
|--------------------------------|-------|---------|
| length<br>in<br>"1m"<br>step   | 40    | XXX=400 |
|                                | 39    | XXX=390 |
|                                | .     | .       |
|                                | 12    | XXX=120 |
|                                | 11    | XXX=110 |
| length<br>in<br>"0.1m"<br>step | 10    | XXX=100 |
|                                | 9.9   | XXX=099 |
|                                | 9.8   | XXX=098 |
|                                | .     | .       |
|                                | 0.4   | XXX=004 |
|                                | 0.3   | XXX=003 |
|                                | 0.2   | XXX=002 |
|                                | 0.1   | XXX=001 |
| Step                           | a [m] | XXX     |

|            |           |
|------------|-----------|
| 4.0 to 40  | +1%       |
| 0.1 to 3.9 | +0.04     |
| a [m]      | Tolerance |

|          |                |
|----------|----------------|
| Part no. | 213485008XXXXX |
|----------|----------------|

|                                 |       |
|---------------------------------|-------|
| Type of cable                   | XX    |
| PVC grey, 8x0.25mm <sup>2</sup> | XX=82 |

|                                               |                                              |                                              |                          |                       |                |                             |              |                    |  |                        |           |                                                          |  |
|-----------------------------------------------|----------------------------------------------|----------------------------------------------|--------------------------|-----------------------|----------------|-----------------------------|--------------|--------------------|--|------------------------|-----------|----------------------------------------------------------|--|
|                                               | All rights reserved<br>Department EC PD - RO | All Dimensions in mm<br>Original Size DIN A3 |                          | Scale<br>2:1          | Free size tol. |                             | Ref.<br>Sub. |                    |  |                        |           |                                                          |  |
|                                               |                                              | Created by<br>TAMAS                          |                          | Inspected by<br>AVRAM |                | Standardisation<br>HOFFMANN |              | Date<br>2014-07-01 |  | State<br>Final Release |           |                                                          |  |
| HARTING Electronics GmbH<br>D-32339 Espelkamp |                                              | Title<br>M12 A-coded Cable Assembly          |                          |                       |                |                             |              |                    |  |                        |           | Doc-Key / ECM-Nr.<br>100578933/UGD/009/A<br>500000076579 |  |
|                                               |                                              | Type<br>TB                                   | Number<br>213485008XXXXX |                       |                |                             |              |                    |  |                        | Rev.<br>A | Page<br>1/1                                              |  |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## HARTING:

[21348500882020](#) [21348500882005](#) [21348500882015](#) [21348500882100](#) [21348500882075](#) [21348500882050](#)  
[21348500882010](#) [21348500882300](#) [21348500882030](#)