
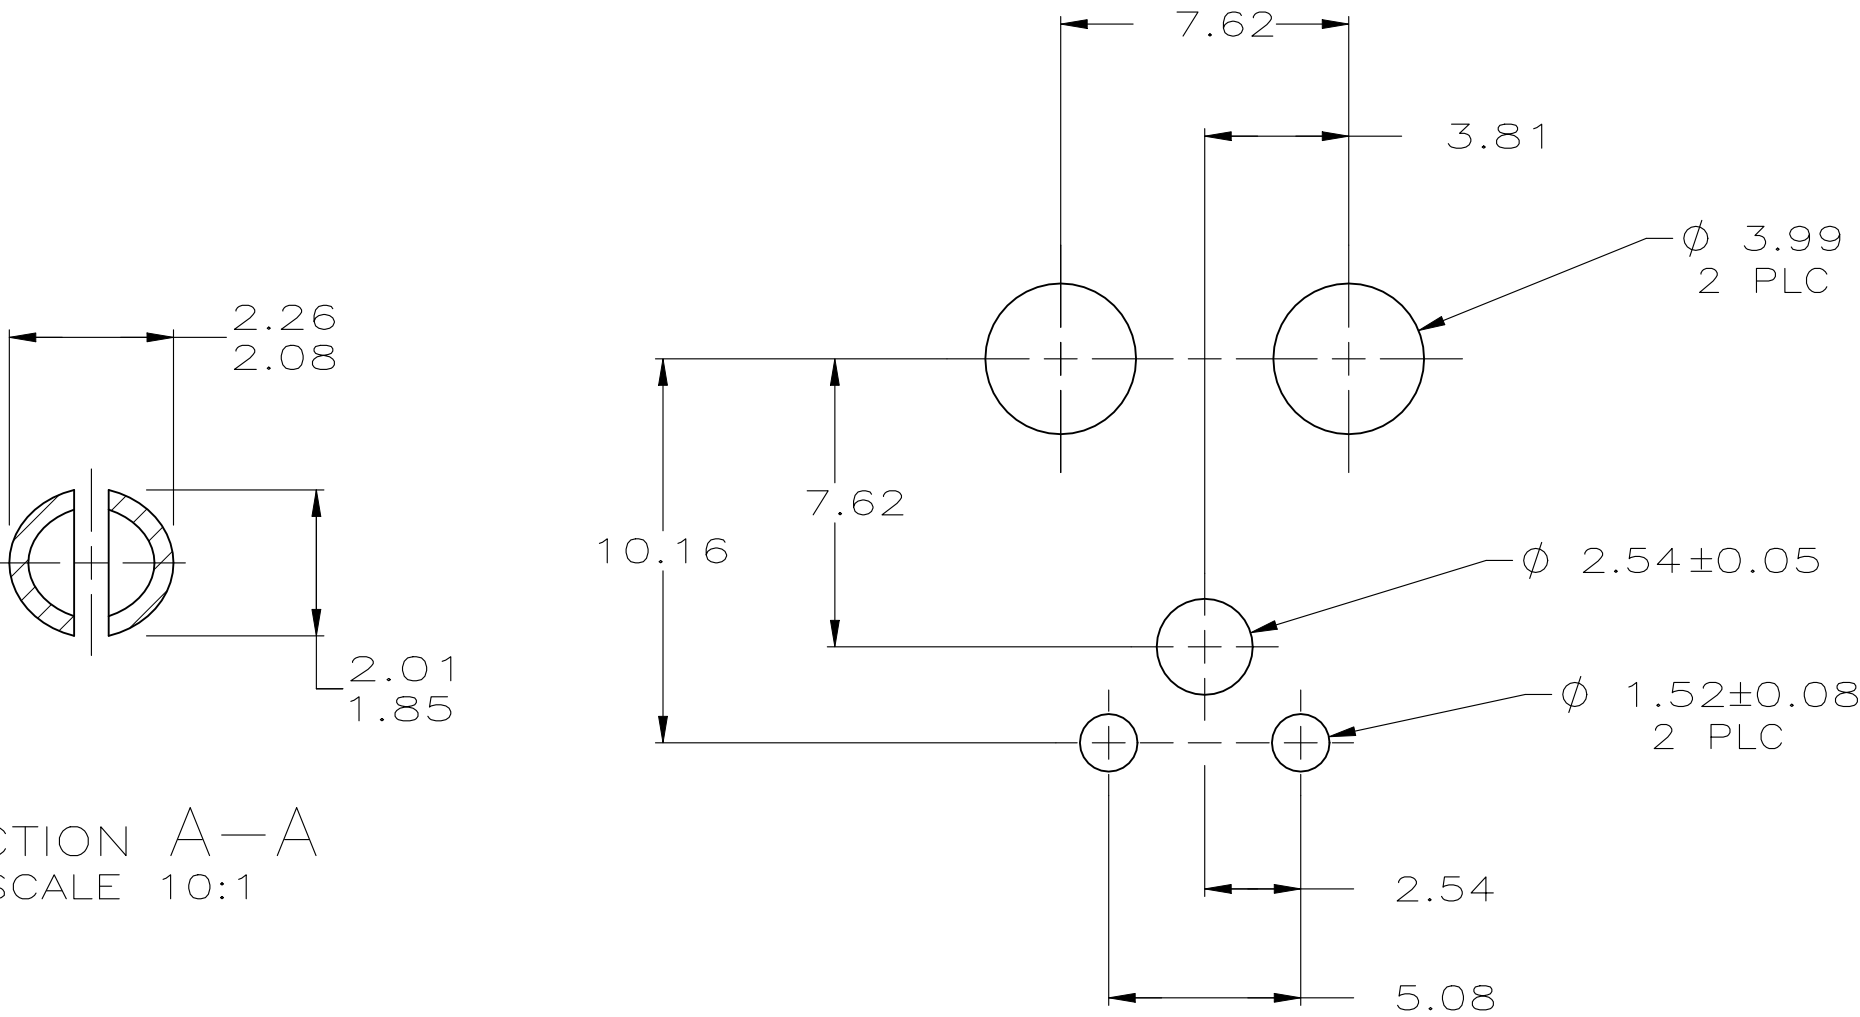
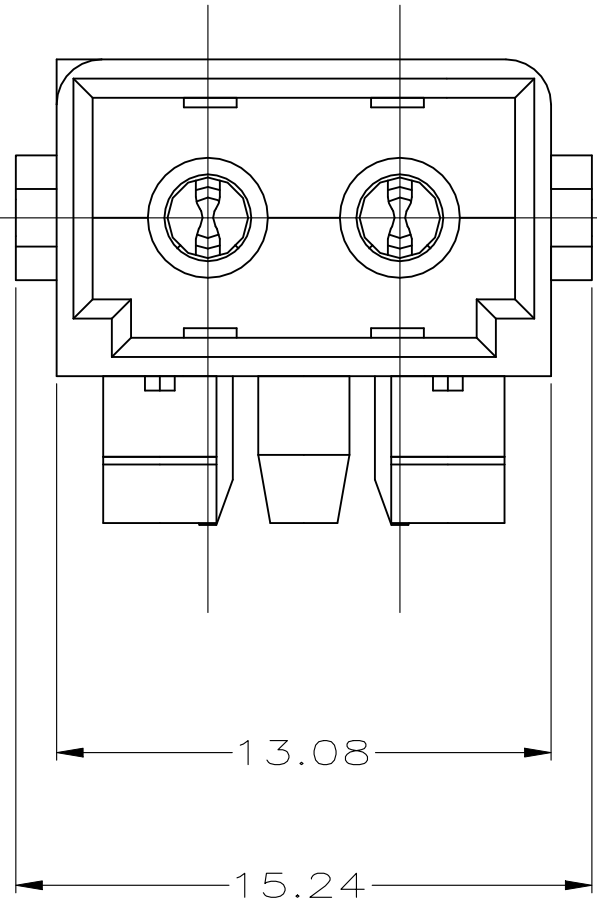


LOC	DIST	REVISIONS					
CM	53	P	LTR	DESCRIPTION	DATE	DWN	APVD
			C1	REVISED PER ECR-21-117185	22OCT2021	PJ	VS

- 1
- PARTS COMPLY WITH AMP SOLDERABILITY SPEC. 109-11-3.
- 2
- RECOMMENDED EXPOSURE TO SOLDER WAVE (254° C, 490°F)
NOT TO EXCEED 5 SECONDS.
- 3
- DIMENSION SHOWN REPRESENT PRODUCT IN DRY CONDITION.
ADDITIONAL 2% GROWTH DUE TO END USE LOCATION
MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE
ACCOUNTED FOR.


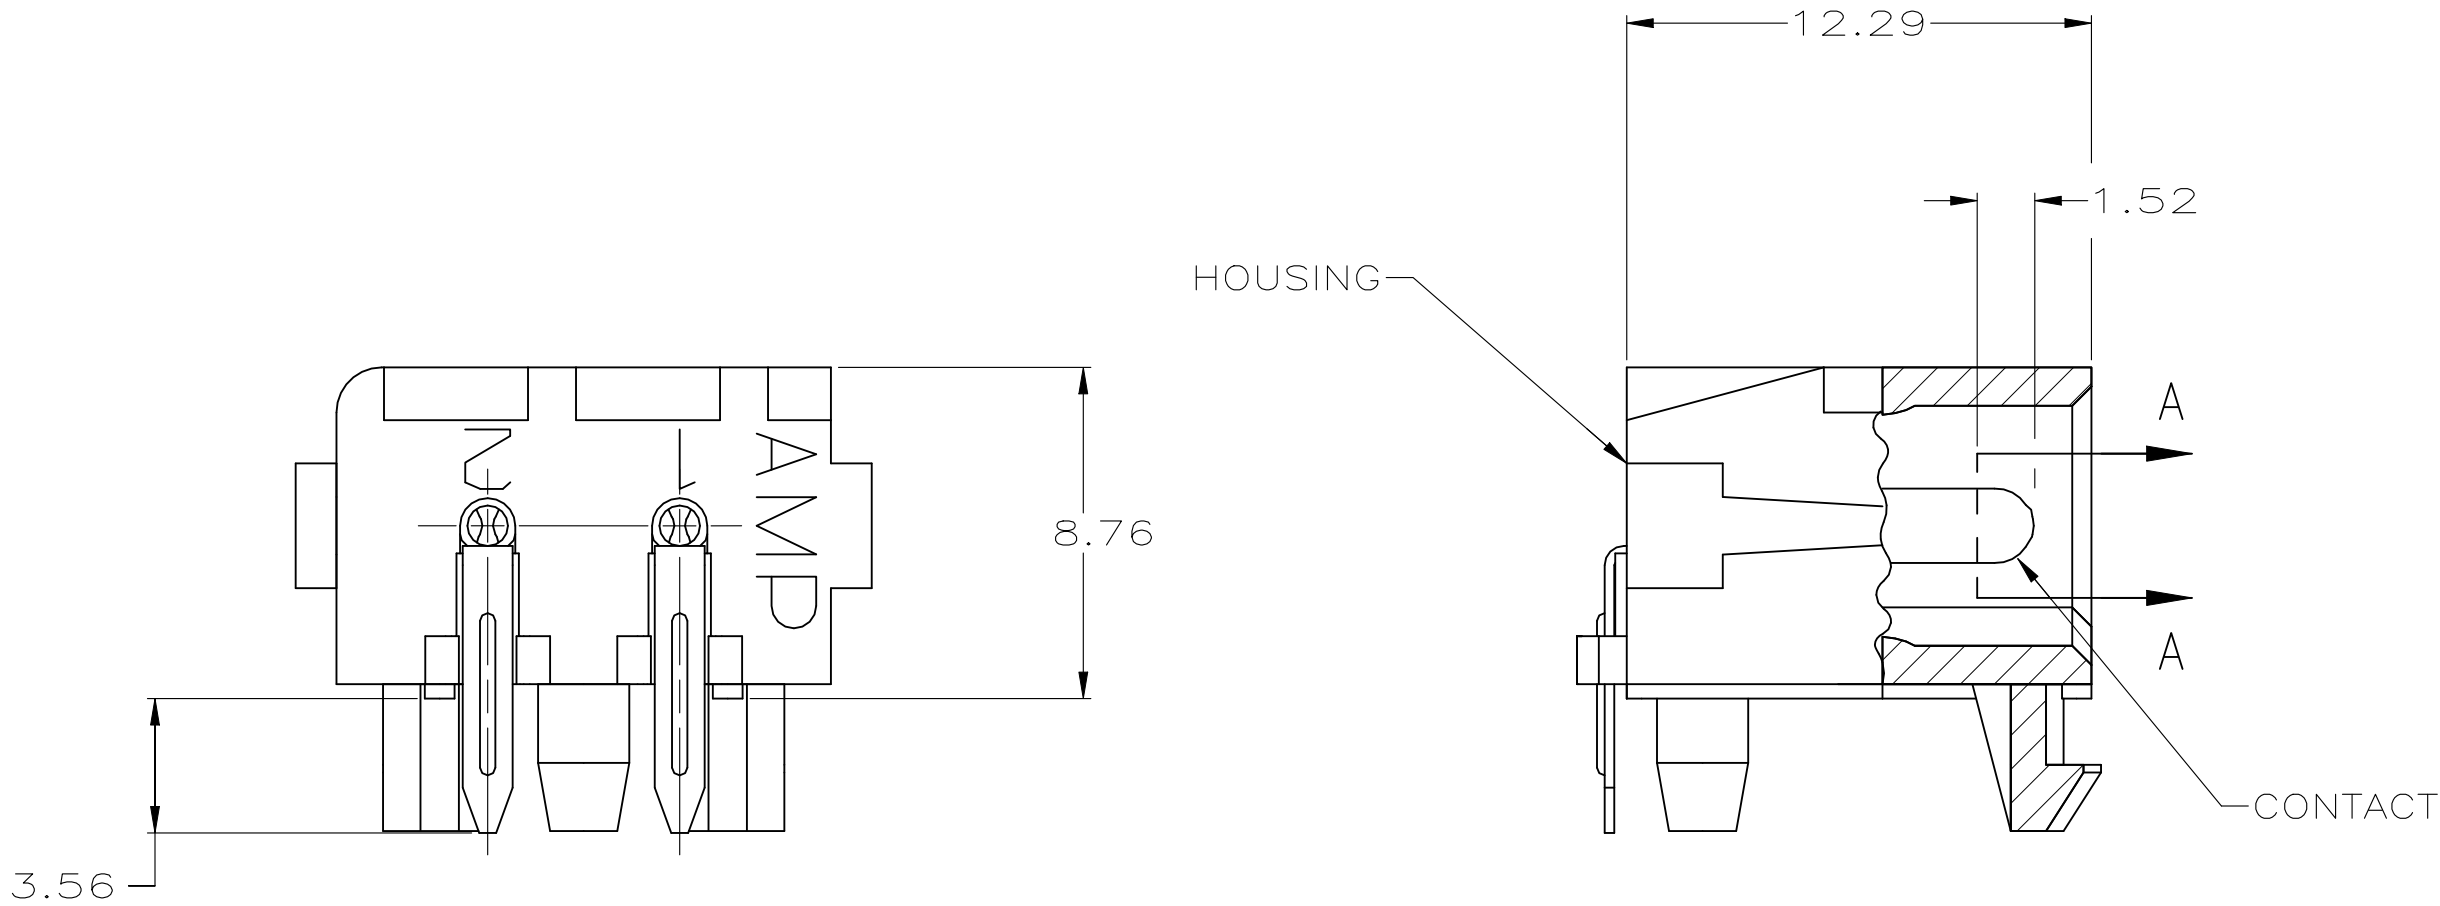


SECTION A-A
SCALE 10:1

RECOMMENDED MOUNTING HOLE PATTERN
FOR 1.58 THICK P.C. BOARD

2.01	.079	5.08	.200	-	-
1.85	.073	3.99	.157	15.24	.600
1.58	.062	3.81	.150	13.08	.515
1.52	.060	3.56	.140	12.29	.484
0.38	.015	2.54	.100	10.16	.400
0.08	.003	2.26	.089	8.76	.345
0.05	.002	2.08	.082	7.62	.300
MM	IN	MM	IN	MM	IN

CONVERSION TABLE

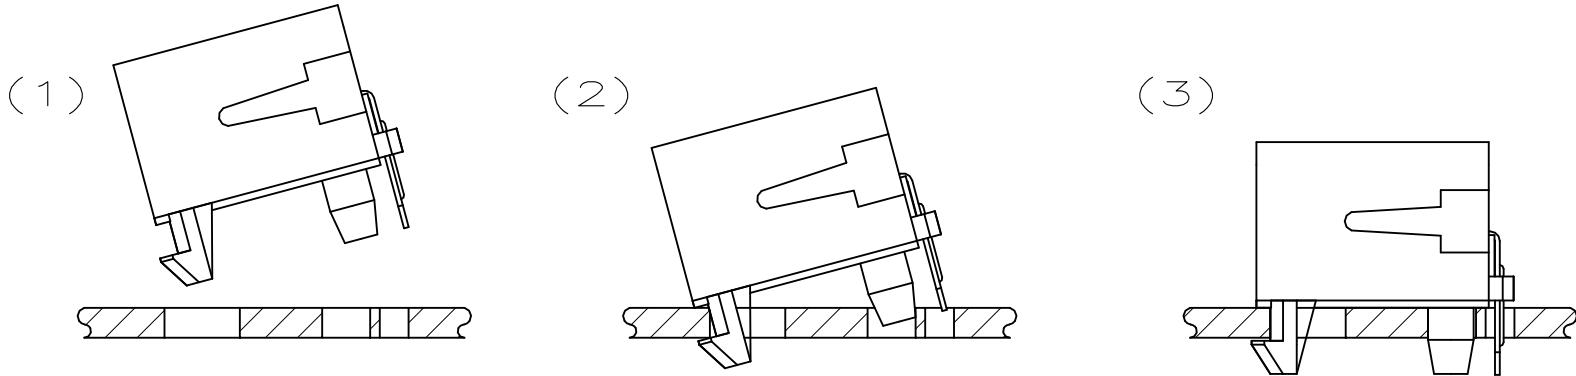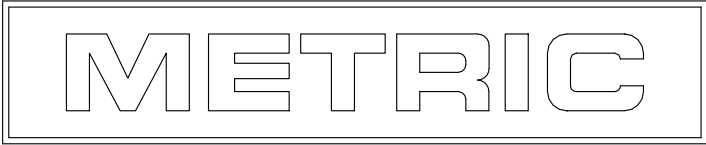

MOUNTING PROCEDURE

COPPER ALLOY	PRE-TIN	NYLON, UL94V-0	NATURAL	794120-2
COPPER ALLOY	PRE-TIN	NYLON, UL94V-2	NATURAL	794120-1
MATERIAL	FINISH	MATERIAL	COLOR	PART NO
CONTACT		HOUSING		
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. LEWIS 4-25-96	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm		CHK R. SWING 4-25-96		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD C. MARTIN 4-25-96	NAME CONNECTOR ASSEMBLY,P.C. HEADER, RIGHT ANGLE MOUNT, COMMERCIAL MATE-N-LOK	
0 PLC ± - 1 PLC ± - 2 PLC ± 0.38 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC		
MATERIAL SEE TABLE		APPLICATION SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO	
FINISH SEE TABLE		WEIGHT -	A2 00779 C-794120 -	
CUSTOMER DRAWING			SCALE 5:1	SHEET 1 OF 1
			REV C1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[794120-1](#)