



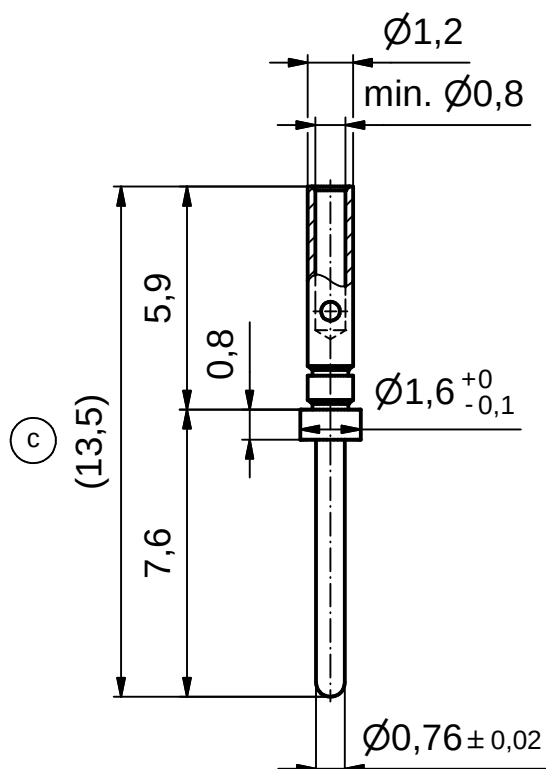


STRIPPING DIMENSION (b) (c)



Part-no. as per finish		
GOLD FLASH over NICKEL (d) (e)	min. 20µin HARD GOLD over min. 50µin NICKEL	min. 30µin HARD GOLD over min. 50µin NICKEL
161A18009X	161B18009X	161C18009X

- (b) **NOTES:**
- (c) 1. Material: Copper alloy
 2. Finish: See table
 3. Temperature range: -55 °C to +125 °C
 4. Rated current: 3 A maximum
 5. Contact resistance: ≤ 10 mOhm
 6. Crimping: Use crimp tool 360X10329X
 With tool insert 360X10629X
 Selector settings: 4 for AWG 22
 3 for AWG 24
 2 for AWG 26
 1 for AWG 28

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH										
DO NOT ALTER CAD DRAWING BY HAND				tolerance DIN ISO 2768-m			 dim. in mm		scale: 5:1	
									material: SEE NOTES	
					date	name		title: HD CRIMP PLUG CONTACT screw machined version accepts cable AWG 28-22		
				drawn	12.03.01	Parei				
1 x e	Ä4116	26.09.11	Lehm.	appd.	12.03.01	Mickenbecker				
1 x d	Ä3750	15.09.10	K.H.	norm						
4 x c	Ä 3698	25.08.10	Lehm.	d-old						
2 x b	Ä 2647	11.01.07	Lehm.				dwg no:		Inventor 10	DIN-A4
a	Original						16K1A152A		sh: 1	
rev.	description	date	name				part no:			SEE TABLE